



IFWPRODUCTS LLC INDUSTRIAL SAFETY · MRO

FIRE & LIFE SAFETY PRODUCTS





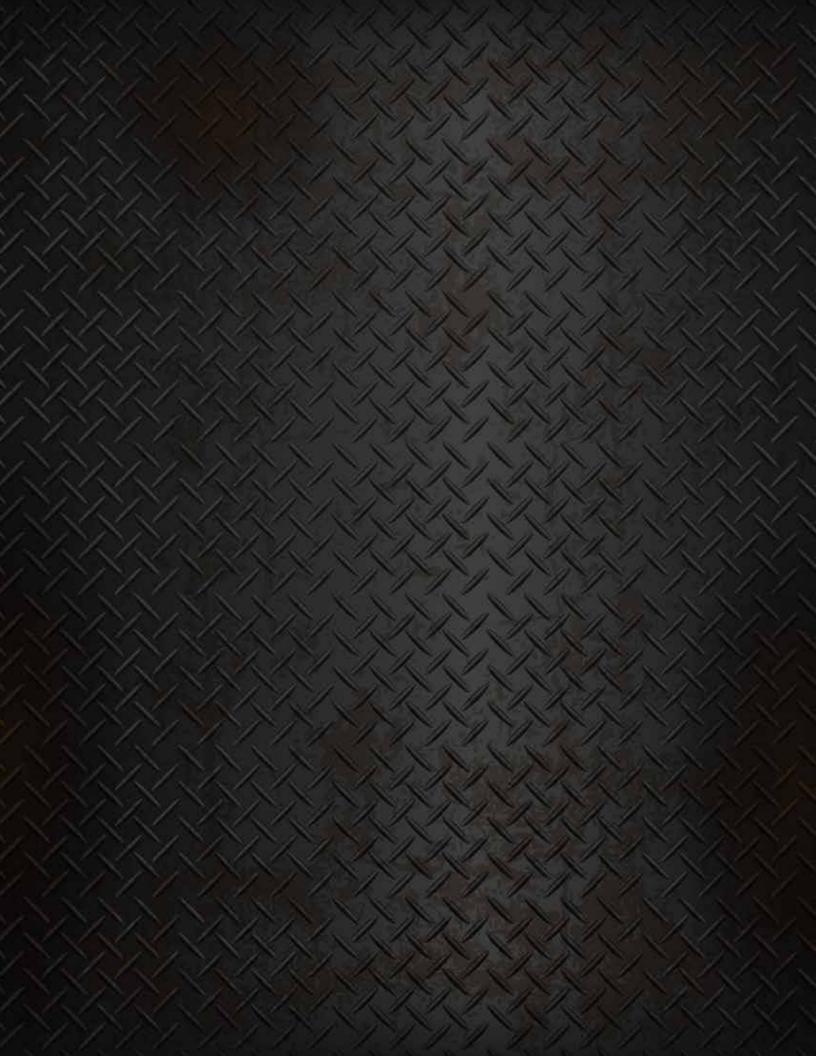


TABLE OF CONTENTS

FIRE EXTINGUISHERS & MORE

Fire Extinguishers	2-10
Fire Extinguisher Brackets & Cart	11
Fire Extinguisher Accessories	12
Fire Extinguisher Signs & Covers	13
Fire Extinguisher Stands	14
Fire Extinguisher Cabinets1	5-17



ESCAPE LADDERS & FIRE BLANKETS



Escape Ladders & Fire Blankets.....18

FIRE HOSE & NOZZLES



Fire Hose & Nozzles.....19

FIRE HOSE STORAGE DEVICES



Fire Hose Storage Devices20

HAND TOOLS & FIRE HOSE FITTINGS

Hand Tools & Fire Hose Fittings.....21

ALARMS & MORE





EXIT & EMERGENCY LIGHTING



Exit & Emergency Lighting......31-33

FIRE CLASSIFI	CATIONS		
Class	Description	Class	Description
A · TRASH · WOOD · PAPER	Fires in ordinary combustibles, such as wood, cloth, paper, rubber, and many plastics.	D COMBUSTIBLE METALS	Fires in combustible metals, such as magnesium, titanium, zirconium, sodium, lithium, and potassium.
B · LIQUIDS · GASES · SOLVENTS	Fires in flammable or combustible liquids, petroleum greases, tars, oil-based paints, solvents, lacquers, alcohols, and flammable gases.	COOKING	Fires in cooking appliances that involve combustible cooking media, such as vegetable or animal oils and fats.
• FLECTRICAL			



Fires that involve energized electrical equipment, such as wiring, circuit breakers, machinery, and appliances.

National Fire Protection Association. (2018). Reporter's Guide: All About Fire. Retrieved from https://www.nfpa.org/News-and-Research/Publications-andmedia/Press-Room/Reporters-Guide-to-Fire-and-NFPA/All-about-fire.



SINGLE-USE FIRE EXTINGUISHERS

Dependable and affordable, these single-use units offer excellent fire protection in and around the home or office.


Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21006204PK	5 lb ABC Service Lite w/ Wall Hook	5.5 lb	8.25 lb	1613/16"	613/16"	4½"	3A:40B:C	340358K
21005766PK	FX340GW-2 5 lb ABC Garage/Workshop w/ Wall Hook	5.5 lb	8.25 lb	1613/16"	613/16"	4½"	3A:40B:C	340358K
21005753MTLK	FX10K 2.75 lb BC Kitchen w/ Metal Valve & Wall Hook	2.9 lb	4 lb	145/16"	4%"	31/4"	10B:C	293263K
21005771PK	FX210 4 lb ABC Living Area w/ Wall Hook	4 lb	7.13 lb	1613/16"	613/16"	4½"	2A:10B:C	340358K



21005753MTLK

CONSUMER RECHARGEABLE FIRE EXTINGUISHERS

Designed for consumer-specific hazards found at home or in the office.

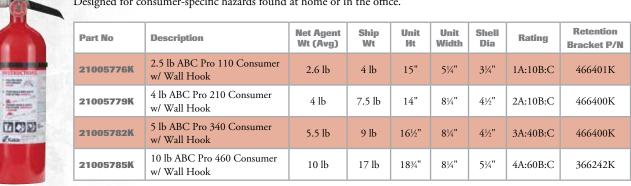



21005782K

FIRE EXTINGUISHERS

TYPES OF FIRE EXTIN	GUISHERS &	THEIR USES
Type of Agent	Class	Sample Applications
ABC Dry Chemical	ABC	Offices, Retail Stores, Warehouses
BC Dry Chemical	BC	Paint Storage, Paint Booths
Clean Agent	ABC	Server Rooms
Class K Wet Chemical	K	Restaurant, Commercial Kitchens
Water	A	Offices, Assembly
Water Mist	AC	Computer Labs
Foam	ВС	Flammable Liquid Storage, Dip Tanks
CO ₂	ВС	Welding Shops
Class D Dry Powder	D	Machine Shops



466227K

PRO LINE™ MULTI-PURPOSE FIRE EXTINGUISHERS

Designed to meet most commercial and industrial applications.

Features

• Metal valve

- Pressed heavy-gauge metal handle & lever
- Chip-resistant paint
- At-a-glance gauge

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466227K	2.5 lb ABC w/ Wall Hook	2.6 lb	3.9 lb	14¼"	55/16"	3¼"	1A:10B:C	466401K
46622701K	2.5 lb ABC w/ Metal Vehicle Bracket	2.6 lb	3.9 lb	14¼"	55/16"	31/4"	1A:10B:C	466401K
466112K	5 lb ABC w/ Wall Hook	5.5 lb	9 lb	165/16"	713/16"	4½"	3A:40B:C	466400K
46611201K	5 lb ABC w/ Metal Vehicle Bracket	5.5 lb	9 lb	165/16"	713/16"	4½"	3A:40B:C	466400K
466204K	10 lb ABC w/ Wall Hook	10 lb	16 lb	19½"	83/16"	5¼"	4A:60B:C	366242K
466206K	20 lb ABC w/ Wall Hook	18 lb	30 lb	21%"	85/16"	7"	6A:80B:C	292474K



466112K



466204K



468000K



468001K



PRO PLUS™ MULTI-PURPOSE FIRE EXTINGUISHERS

Full featured—perfect for industrial and commercial fire protection needs.

• Suitable for Class A, B, & C fires

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
468000K	2.5 lb ABC w/ Vehicle Bracket	2.6 lb	4.38 lb	15"	5½"	3"	1A:10B:C	24160B
468001K	5 lb ABC w/ Vehicle Bracket	5 lb	8.63 lb	15"	7¼"	41/4"	3A:40B:C	24530B
468002K	10 lb ABC w/ Wall Hook	10 lb	17.44 lb	191/8"	7¾"	51/4"	4A:80B:C	366242K
468003K	20 lb ABC w/ Wall Hook	20 lb	31 lb	21%"	9¼"	71/4"	6A:120B:C	292474K



468003K

ADVANTAGE™ FIRE EXTINGUISHERS

Made to handle easier and recharge quicker.

Features

- Larger neck opening
- Square thread design for rapid valve removal
- Threaded siphon tube

- Hose strap won't scratch cylinder
- Larger pull pin & handle for ease of use

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21007865B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5 lb	15"	5½"	31/4"	1A:10B:C	466401K
21007866B	5 lb ABC w/ Wall Hook	5 lb	9.5 lb	167/16"	7½"	4½"	3A:40B:C	466400K
21008936B	5 lb ABC w/ Vehicle Bracket	5 lb	9.5 lb	161/16"	7½"	4½"	3A:40B:C	466400K
21007867B	10 lb ABC w/ Wall Hook	10 lb	17.5 lb	19%"	8"	5¼"	4A:60B:C	366242K
21007868B	20 lb ABC w/ Wall Hook	18 lb	31.5 lb	2111/16"	9"	7½"	6A:80B:C	292474K







22603B

STANDARD MULTI-PURPOSE FIRE EXTINGUISHERS

Easily tackles the majority of fire risks found in commercial, industrial, and domestic applications.

Feature

- Contains highest percentage of essential base ingredients in fire extinguisher industry
- Suitable for use on Class A, B, & C fires

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
22430B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5.4 lb	14%"	5½"	3"	1A:10B:C	24160B
22435B	5 lb ABC w/ Wall Hook	5 lb	10 lb	15¼"	7¼"	41/4"	3A:40B:C	24530B
22486B	5 lb ABC w/ Vehicle Bracket	5 lb	10 lb	15¼"	7¼"	41/4"	3A:40B:C	24530B
22603B	10 lb ABC w/ Wall Hook	10 lb	17 lb	1815/16"	7¾"	5¼"	4A:80B:C	366242K
22682B	20 lb ABC w/ Wall Hook	20 lb	33 lb	211/8"	91/4"	7¼"	6A:120B:C	292474K



23384B



23476B

EXTRA DRY CHEMICAL FIRE EXTINGUISHERS

A good choice for fire risks in most commercial and industrial settings.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23384B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5.8 lb	14%"	5½"	3"	1A:10B:C	24160B
23463B	5 lb ABC w/ Vehicle Bracket	5 lb	10.4 lb	15¼"	71/4"	41/4"	3A:40B:C	24530B
23390B	5 lb ABC w/ Wall Hook	5 lb	10.4 lb	15¼"	7½"	41/4"	3A:40B:C	24530B
23396B	10 lb ABC w/ Wall Hook	10 lb	18 lb	1815/16"	7¾"	5¼"	4A:80B:C	366242K
23497B	20 lb ABC w/ Wall Hook	20 lb	33 lb	211/8"	9¼"	7¼"	6A:120B:C	292474K
23471B	2.75 lb BC w/ Vehicle Bracket	2.75 lb	5.4 lb	14%"	5½"	3"	10B:C	24160B
23476B	5 lb BC w/ Wall Hook	5.5 lb	10.4 lb	15¼"	7¼"	41/4"	40B:C	24530B
23781B	10 lb BC w/ Wall Hook	10 lb	18 lb	191/8"	81/8"	5¼"	60B:C	366242K
23482B	20 lb BC w/ Wall Hook	20 lb	33 lb	211/8"	9¼"	7¼"	120B:C	292474K

EXTRA HIGH-FLOW DRY CHEMICAL FIRE EXTINGUISHERS

Discharge rate exceeds the minimum one-pound-per-second recommedation of NFPA for pressure, three dimensional, and obstacle fires.

Features

- Steel cylinder
- Internal siphon tube
- Heavy-duty chrome-plated brass valve
- U.S. Coast Guard approved w/ bracket listed on the UL label
- Meets DOT requirements

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21006158B	10 lb ABC w/ Wall Hook	10 lb	18 lb	191/8"	81/8"	51/4"	1A:20B:C	366242K
21006160B	20 lb ABC w/ Wall Hook	20 lb	33 lb	211/8"	91/4"	7¼"	4A:60B:C	292474K
21006159B	10 lb Purple K w/ Wall Hook	10 lb	18 lb	191/8"	81/8"	51/4"	20B:C	366242K
21006161B	20 lb Purple K w/ Wall Hook	20 lb	33 lb	211/8"	9¼"	7¼"	60B:C	292474K



5

21006158B

BRIGADE CARTRIDGE OPERATED PORTABLES

Comes with more extinguishing agent for higher fire ratings, longer range, extended discharge times, and higher flow rates.

Features

- Swivel discharge nozzle for either-hand use
- UL listed
- USCG approved

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466521B	10 lb ABC	10.65 lb	25.5 lb	18¼"	9½"	51/8"	4A:40B:C	466541B
466527B*	20 lb ABC	21 lb	45.5 lb	23%"	111/4"	61/4"	10A:60B:C	466542B
466528B	20 lb BC	23 lb	47.5 lb	23%"	11¼"	61/4"	60B:C	466542B
466529B	20 lb PK	22 lb	46.5 lb	23%"	111/4"	61/4"	80B:C	466542B
466539B	30 lb BC	29 lb	55 lb	23%"	12¼"	7¾16"	120B:C	466543B
466534B	30 lb PK	28.5 lb	54.5 lb	23%"	121/4"	73/16"	120B:C	466543B

^{*}While Supplies Last



466521B

The state of the s

589AX



COMPLIANCE FLOW DRY CHEMICAL FIRE EXTINGUISHER

Offers superior vertical and horizontal range.

Features

• Includes rubber boot & gauge guard

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
589AX	30 lb ABC w/ Wall Hook	30 lb	58 lb	26½"	11"	8"	10A:160B:C	12033AX

RED LINE CARTRIDGE OPERATED FIRE EXTINGUISHERS

Designed to protect ordinary-to-high-risk hazards in industries where the occurrence or possibility of fire is high.

Features

- Increased reliability
- On-the-spot recharge
- Ease of service

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
435109AS	20 lb ABC w/ Wall Hook	35 lb	20½"	10¾"	6"	6A:60B:C	14091AS
435151AS	30 lb ABC w/ Wall Hook	49.5 lb	22½"	111/16"	7"	10A:80B:C	14098AS



435109AS



AUTOMOTIVE FIRE EXTINGUISHERS

For an extra measure of safety for cross-country or cross-town trips.



Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
440162MTLK	Fire Control FC110 2.5 lb ABC w/ Metal Valve & Plastic Strap Bracket	2.5 lb	3.9 lb	143/16"	4%"	31/4"	1A:10B:C	322057K
466423K	Fire Control FC110M 2.5 lb ABC w/ Metal Valve, Plastic Bracket, & Metal Strap (Rechargeable)	2.6 lb	3.9 lb	14¼"	4½"	31/4"	1A:10B:C	466401K
466425K	Fire Control FC340M-VB 5 lb ABC w/ Metal Valve, Metal Bracket, & Metal Strap (Rechargeable)	5.5 lb	8.4 lb	16%"	5¾"	4½"	3A:40B:C	466400K
440160MTLK	Fire Control FC5 2 lb BC w/ Metal Valve & Plastic Strap Bracket	2 lb	3.2 lb	115/16"	45%"	31/4"	5B:C	322057K
440161MTLK	Fire Control FC10 2.75 BC w/ Metal Valve, Plastic Bracket, & Metal Strap	2.9 lb	4 lb	143/16"	4%"	31/4"	10B:C	322057K
466422K	Fire Control FC10M 2.5 lb BC w/ Metal Valve, Plastic Bracket, & Metal Strap (Rechargeable)	2.9 lb	4.4 lb	141/4"	4½"	31/4"	10B:C	466401K
21006287MTLK	Auto FX II 2 lb BC w/ Metal Valve & Plastic Strap Bracket	2 lb	3.2 lb	115/16"	4%"	3¼"	5B:C	322057K



AUTOMOTIVE EXTINGUISHERS

Vehicle fires are an often-overlooked part of the fire problem, yet in 2020, an estimated 209,500 vehicle fires caused 630 civilian fire deaths, 1,700 civilian fire injuries and \$5.2 billion in direct property damage.\(^1\) The DOT requires vehicles used to transport hazardous materials (in a quantity that requires placarding) must be equipped with a fire extinguisher, having UL rating of 10B:C or more.\(^2\) A vehicle that is not used to transport hazardous materials must be equipped with either a fire extinguisher having UL ratings of 5B:C or more; or two fire extinguishers, each of which has a UL rating of 4B:C or more.

THE WHY

¹Ahrens, M. and Evarts, B. (2021, September). Fire Loss in the United States During 2020.
Retrieved from https://www.nfpa.org//-/media/Files/News-and-Research/Fire-statistics-and-reports/US-Fire-Problem/osFireLoss.pdf.

²Cornell Law School - Legal Information Institute. (2018). 49 CFR 393.95 – Emergency Equipment on All Power Units. Retrieved from https://www.law.cornell.edu/cfr/text/49/393.95.




MULTI-PURPOSE CHROME FIRE EXTINGUISHERS

A popular choice for vehicles and watercraft—effectively fights Class A, B, and C fires.

Features

• Highest UL rating per size





417TCAX

CHROME DRY CHEMICAL FIRE EXTINGUISHER

Designed for combating flammable liquid and pressurized gas fires.

Features

Electrically non-conductive

• Won't bake to hot surfaces


Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
620TCAX	1 lb BC w/ Vehicle Bracket	1 lb	2.5 lb	10"	3½"	25/8"	2B:C	-

DISPOSABLE DRY CHEMICAL FIRE EXTINGUISHERS

Dependable and affordable protection.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466142MTLK	FA10G 2.5 lb BC w/ Metal Valve & Strap Bracket	2.5 lb	3.9 lb	143/16"	45%"	31/4"	1A:10B:C	322057K
21005944MTLK	FA5B 2 lb BC w/ Metal Valve & Plastic Strap Bracket	2 lb	3.2 lb	115/16"	45%"	31/4"	5B:C	322057K
466141MTLK	2.75 lb BC w/ Metal Valve & Plastic Strap Bracket	2.9 lb	4 lb	143/16"	45%"	31/4"	10B:C	322057K







MARINE FIRE EXTINGUISHERS

Designed for watercraft use.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466627MTLK	Mariner 110 2.5 lb ABC w/ Metal Valve & Plastic Strap Bracket	2.5 lb	3.9 lb	143/16"	45%"	31/4"	1A:10B:C	322057K
466635MTLK	Mariner M5G 2 lb BC w/ Metal Valve & Plastic Strap Bracket	2 lb	3.2 lb	115/16"	45%"	31/4"	5B:C	322057K
466179MTLK	Mariner M5G 2 lb BC w/ Metal Valve & Plastic Strap Bracket	2 lb	3.2 lb	11%6"	45/8"	31/4"	5B:C	322057K
466628MTLK	Mariner 10 3 lb BC w/ Metal Valve & Plastic Strap Bracket	2.9 lb	4 lb	143/16"	45%"	31/4"	10B:C	322057K
21008634MTLK	Auto/Marine M10G 2.75 lb BC w/ Metal Valve & Plastic Strap Bracket	2.9 lb	4 lb	14¾6"	45%"	31/4"	10B:C	322057K



466628MTLK

MARINE EXTINGUISHERS

The United States Coast Guard requires Coast Guard approved, hand-portable fire extinguishers for all boats using flammable fuels with either a B-I or B-II classification (flammable fuels—gas, oil, and grease) and a marine-type mounting bracket. It is recommended that extinguishers be mounted in a readily accessible position, away from the flammable areas, such as a galley or engine compartment. When selecting a fire extinguisher for marine use, make sure that the label says "Marine Type USCG".



REQUIRED PORTABLE FIRE EXTINGUISHERS (motorboats without a fixed fire extinguishing system)								
Length of Boat	Minimum Number of 5-B Rated Fire Extinguishers							
Under 26 Feet	1							
26 and over, but under 40 feet	2							
40 and over, but not over 65 feet 3								

United States Coast Guard. (2018). A Boater's Guide to the Federal Requirements for Recreational Boats and Safety Tips. Retrieved from https://www.uscgboating.org/images/420.PDF.



EXTRA PURPLE K FIRE EXTINGUISHERS

Designed for use on high-hazard Class B and C fires—ideal for industrial and commercial settings where flammable liquids are stored.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23485B	2.5 lb Purple K w/ Wall Hook	5.8 lb	14%"	5½"	3"	10B:C	24160B
23488B	5 lb Purple K w/ Wall Hook	10.4 lb	15¼"	7¼"	41/4"	30B:C	24530B
23778B	10 lb Purple K w/ Wall Hook	17 lb	1815/16"	7¾"	5¼"	80B:C	366242K
23495B	20 lb Purple K w/ Wall Hook	32 lb	211/8"	91/4"	71/4"	120B:C	292474K

23778B



EXTRA HALOTRON® I FIRE EXTINGUISHERS

Offers an extended discharge range for effective protection of computer rooms, telecommunications, robotics, and other high-tech areas.



24567B

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
24563B	2.5 lb Halotron I w/ Vehicle Bracket	6.9 lb	147/8"	61/8"	3"	2B:C	420118K
24567B	5 lb Halotron I w/ Wall Hook	10.6 lb	15¼"	61/8"	41/4"	5B:C	24530B
23082B	11 lb Halotron I w/ Wall Hook	23 lb	16¾6"	8¾"	7¼"	1A:10B:C	23131B
23097B	15.5 lb Halotron I w/ Wall Hook	26.5 lb	171/%"	8¾"	71/4"	2A:10B:C	23131B

PRO PLUS™ HALOTRON® I FIRE EXTINGUISHERS

Leaves no residue and environmentally safe—ideal for computer rooms and other high-tech areas.



466728K

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466727K	2.5 lb Halotron I w/ Metal Strap Bracket	6.25 lb	14%"	67/16"	3"	2B:C	420118K
466728K	5 lb Halotron I w/ Wall Hook	10 lb	15¼"	67/16"	41/4"	5B:C	24530B
466729K	11 lb Halotron I w/ Wall Hook	23 lb	163/16"	7¼"	7¼"	1A:10B:C	23131B
466730K	15.5 lb Halotron I w/ Wall Hook	26.5 lb	171/8"	8¾"	7¼"	2A:10B:C	23131B

KIDDE



NON-MAGNETIC MRI FIRE EXTINGUISHER

Suitable for protecting occupancy areas outside magnetic resonance imaging suites.

Features

- Single-use
- MR conditional rated

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21005726PK	5 lb ABC MR w/ Wall Hook	7.75 lb	161/16"	7½"	4½"	3A:40B:C	-

21005726PK

NON-MAGNETIC WATER MIST FIRE EXTINGUISHERS

Best choice for protecting hospital environments, telecommunication facilities, and "clean room" manufacturing facilities. **NOTE**: Units ship empty.

Features

- Uses de-ionized water (sold separately)
- MR conditional—non-magnetic, construction tested for use in MRI facilities to 11.7 Tesla (including wall hook)

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
270NMAX	1.75 gal Water Mist w/ Wall Hook	7 lb	24½"	11"	7"	2A:C	-
272NMAX	2.5 gal Water Mist w/ Wall Hook	8 lb	27½"	11"	7"	2A:C	-



9

CO₂ FIRE EXTINGUISHERS

Ideal for data processing centers, labs, telecommunication rooms—anywhere contamination and/or cleanup are a concern.

Features

- Uses liquefied gas
- Effectively fights Class B & C fires

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21111B	Badger Extra 5 lb CO ₂ w/ Wall Hook	15 lb	17"	8½"	5¼"	5B:C	270191K
21106B	Badger Extra 10 lb CO ₂ w/ Wall Hook	30 lb	195/16"	1015/16"	615/16"	10B:C	290511K
21103B	Badger Extra 15 lb CO ₂ w/ Wall Hook	40 lb	26"	1015/16"	615/16"	10B:C	290511K
21096B	Badger Extra 20 lb CO ₂ w/ Wall Hook	51 lb	26"	12"	8"	10B:C	294147K
466180K	Kidde Pro 5 lb CO ₂ w/ Wall Hook	15 lb	17"	8½"	5¼"	5B:C	270191K
466181K	Kidde Pro 10 lb CO ₂ w/ Wall Hook	30 lb	19¾"	10%"	67/8"	10B:C	290511K
466182K	Kidde Pro 15 lb CO ₂ w/ Wall Hook	40 lb	26"	10%"	67/8"	10B:C	290511K
466183K	Kidde Pro 20 lb CO ₂ w/ Wall Hook	51 lb	26"	12"	8"	10B:C	294147K





DID YOU KNOW?

Although foam fire extinguishers are rated for use on both Class A and Class B fires, they are normally installed where a spill or pool-type fire could occur. When foam is applied from an extinguisher, it will naturally spread across the burning liquid surface, effectively smothering the fire. If the flammable liquid vapor is prevented from contacting air, the fire is extinguished. Although re-ignition is a possibility with other extinguishing agent applications, for these units, it is nearly impossible due to the foam blanket preventing fuel vapors from contacting air.

UNIVERSAL ULTRA FOAM FIRE EXTINGUISHER

Effective on both Class A and B fires—eliminates the application guesswork associated with other foam units. **NOTE**: Unit ships empty.

Features

- No offensive odors
- Non-toxic
- Environmentally friendly & biodegradable

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23697B	2.5 gal AR-AFFF Foam	12 lb	24½"	8¾"	7"	1A:30B	292474K



23697B







WET CHEMICAL & WATER FIRE EXTINGUISHERS

Wet Chemical units are designed to supplement commercial kitchen fire suppression systems—easy to use and very effective in fighting difficult cooking media fires. **Water** units perform better, last longer, and are the number one choice for virtually all hazards where class A-type materials may be present. **NOTE**: Units ship empty.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
25064B	Badger Extra 6 L Wet Chemical w/ Wall Hook	15 lb	19½"	8¾"	7"	K	23131B
23171B	Badger Extra 2.5 gal Wet Chemical w/ Wall Hook (Ships Empty)	19 lb	24½"	8¾"	7"	K	292474K

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
16888B	Badger Extra 2.5 gal Water w/ Wall Hook (Ships Empty)	8 lb	24¾"	8¾"	7"	2A	292474K
466403K	Kidde Pro 2.5 gal Water w/ Wall Hook (Ships Empty)	8.3 lb	24¾"	8¾"	7"	2A	292474K
04795K	Metal Charging Adapter (For Water & Wet Chemical Extinguishers)						



CLASS D DRY POWDER FIRE EXTINGUISHER

Designed for use on combustible metal fires.

Features

- "Soft-flow" extension applicator
- "Tip" keeps operator away from extreme heat & toxic fumes
- Special corrosion-resistant yellow (Class D) paint finish
- FM approved

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
570AX	30 lb Sodium Chloride w/ Wall Hook	53 lb	35"	13"	8"	N/A	12033AX



WHEELED STORED PRESSURE PORTABLES

Designed for single-person operation and to pass easily through standard doorways.

Features

• Contains the highest percentage of essential base ingredients found in the industry

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating
20127B	50 lb ABC w/ 25' Hose	140 lb	461/4"	23"	23"	20A:160B:C
20180B	50 lb PK w/ 25' Hose	140 lb	461/4"	23"	23"	160B:C
20653B	125 lb ABC w/ 50' Hose	300 lb	58"	28"	39¼"	40A:240B:C

KIDDE

FIRE EXTINGUISHER BRACKETS & CART

UNIVERSAL STRAP BRACKETS

Part No Description

UB25BR Strap Bracket (For 2.5 & 2.75 lb D/C & Halon Extinguishers)
UB5BR Strap Bracket (For 5 & 6 lb D/C & Halon Extinguishers)

WALL HOOKS

Perfect match for Badger or Kidde Extinguishers

Features

• Metal construction (Except for 293263K)

• Black

Part No Description

23704B Badger Wall Hook (Fits 10 lb ABC Badger Extinguishers)

1141K Kidde Wall Hook (Fits Kidde 466423, 440161, & 466422 Extinguishers)

340791K Kidde Wall Hook (Fits Kidde 466204 & 466205 Extinguishers)

340358K Kidde Wall Hook (Fits Kidde 466288, 466112, 46611201, 466424, & 466086 Extinguishers)

340357K Kidde Wall Hook (Fits Kidde 466227, 46622701, 466228, & 4662801 Extinguishers) **293263K** Kidde Wall Hook (Fits Kidde 466289, 466164, 466057, & 46616401 Extinguishers)





Part No Description

UBRKBR Clip Bracket (For 2.5 & 2.75 lb D/C & Halon Extinguishers)

5BRKBR Clip Bracket (For 5 & 6 lb D/C & Halon Extinguishers)

UNIVERSAL VEHICLE BRACKETS

Part No Description

 12313AX
 Vehicle Bracket (For 4¼"-4½" Dia Shells)

 12034AX
 Vehicle Bracket (For 4½"-5½" Dia Shells)

 12031AX
 Vehicle Bracket (For 5½"-6½" Dia Shells)

 12032AX
 Vehicle Bracket (For 6½"-7" Dia Shells)

 1350GAX
 Vehicle Bracket (For 7½"-8" Dia Shells)

 Vehicle Bracket (For 7½"-8" Dia Shells)

FORKLIFT BRACKET

Designed to work with a Strap Bracket (sold separately).

Features

• Secures extinguisher forklift support

Part No Description
21009952K Forklift Bracket

HEAVY-DUTY DOLLY CART

Easily moves large, heavy extinguishers.

Features

• Fits 7"-8" Dia


Part No Description 859AX Dolly Cart













KIDDE

21009952K



12 | FIRE EXTINGUISHER ACCESSORIES

FIRE EXTINGUISHER

INSPECTION RECORD

ATING		CTION F	HECORE	
	2023		2024	202
-		JAN.		
7	100	FER	100	103
200	-	MAR	1	de
980	67	APRIL.	100	100
100	100	BLOY.		
511-		FINE	10.10	0.1
2007		FILT	1000	di.
(0)	(30)	A16	0-1	25
	1	SEPT		
表示人		GCT.		16
8572	100	101	1/- 17	1
	0.00	OEC.	0	10

40.		100		MANAGE.	
RIL	30	1		APRIL	
DY.				MAY	Ī
NE.	10.10	VIII TO		JUNE	
LT.	0.0	ALC: NO		JULY AUG.	
16	0-1	25.00		AUG.	
191				SEPT.	Ī
CT.				OCT.	Ī
OW.	1/	2-27		NOV.	Ī
10	9			DEC.	Ī

4PTAGBR

EXTINGUISHER ACCESSORIES

Part No Description
UPPNBR Fire Extinguisher Pull Pins, 100/Pkg

SPPBRSingle-Point Pull Pins, 100/PkgCNDSRBR9" Extinguisher Tamper Seal, Red, 500/BagCNDSYBR9" Extinguisher Tamper Seal, Yellow, 500/BagCNDSBKBR9" Extinguisher Tamper Seal, Black, 500/BagCNDSBLBR9" Extinguisher Tamper Seal, Blue, 500/BagCNDSGBR9" Extinguisher Tamper Seal, Green, 500/Bag

4PTAGBR Plastic 4-Year Inspection Tag

PTAGBR Plastic Inspection Tag (One Year Only)

MYTAGBR Metal 4-Year Inspection Tag


MYTAGBR



CNDSRBR









CUSTOMSTAMP1BR

CUSTOM-IMPRINTED SELF-INKING STAMP KITS

Easily stamps standard and coated cardstock.

NOTE: Signed proof must be received before order is processed. Allow one week for delivery.

Features

- Includes stamp, ink, & dry cartridge
- Clear positioning window for accurate alignment
- CUSTOMSTAMP1BR offers 2500 impressions
- CUSTOMSTAMP2BR offers 8000 impressions

t No Description

CUSTOMSTAMP1BRStamp Kit, $1\frac{1}{2}$ " x 3"CUSTOMSTAMP2BRStamp Kit, $\frac{1}{2}$ " x $1\frac{1}{2}$ "

DIC1BR Dry Ink Cartridge (For CUSTOMSTAMP1BR)
DIC2BR Dry Ink Cartridge (For CUSTOMSTAMP2BR)



Contact your Account Manager for ordering details.



Part No

▲ VCBBR

▲ BVCBBR

▲ NBBR

▲ NWBBR

▲NBBR

▲NWBBR

▲BWBBR

▲WBBR

▲CWBBR

PDBBR

Description

Valve Cleaning Brush Brass Valve Cleaning Brush Nylon Valve Brush Nylon Cleaning Brush Brass Cleaning Brush Wire Handled Brush Cylinder Wire Brush Pipe Dope Brush







PDBBR

WBBR

FIRE EXTINGUISHER SIGNS & COVERS

FIRE SAFETY SIGNS

Part No Description

1135WLLFSBRDie-Cut "Fire" Extinguisher, Self-Adhesive Vinyl, 8½" x 3", White/Red1107LLFSBR"Fire Extinguisher" Arrow, Self-Adhesive Vinyl, 12" x 8", Red/White85261BY"Fire Extinguisher" Arrow, Self-Adhesive Vinyl, 14" x 3½", Red/White

7109LGFSBR "Fire Extinguisher" Arrow, Glow-in-the-Dark, Self-Adhesive Vinyl, 18" x 4", Red/Yellow

2108LABR "Fire Extinguisher" Arrow, Aluminum, 12" x 4", White/Red





CUSTOM SIGNS AVAILABLE

Contact your Account Manager for ordering details.



13

85261BY

1107LLFSBR

EXTINGUISHER COVERS

Clearly labeled with large black imprints and black trim.

Features

Made of reinforced vinyl

• Hook-&-loop closure

- Fits portable, pressurized, & cartridge-operated units
- Red

Part No Description

►FEC1BR ►FEC1WBR ►FEC2BR ►FEC2WBR ►FEC2WBR ►FEC3WBR ►FEC3WBR FEC3WBR FEC3WBR FEC3WBR FEC3WBR FEC3WBR FEC3WBR FECOVET W/O Window, 25" x 16½" FECOVET W/O Window, 31" x 16½" FECOVET W/O Window, 31" x 16½"



FEC1BR



FEC1WBR In Use

HEAVY-DUTY EXTINGUISHER COVERS

Fits portable, pressurized, and cartridge-operated extinguishers.

Features

- Made of acrylic-coated polyester
- Minimum 5-year lifespan (outdoors, under normal conditions)
- Hook-&-loop closure
- Red

Part No Description

▲ FEC10BR ★ FEC7BR ★ FEC8BR ★ FEC9BR ★ Heavy-Duty FE Cover, 20" x 11½" **★ FEC9BR ★ Heavy-Duty** FE Cover, 25" x 16½" **★ Heavy-Duty** FE Cover, 30" x 16½"



FEC7BR

WHEELED EXTINGUISHER COVERS

A small investment that protects a much larger one.

Features

- Available in standard reinforced vinyl or heavy-duty, acrylic-coated polyester
 Black imprint/trim
 Red
- Hook-&-loop closure

Part No Description

▲WUC1BRStandard Wheeled FE Cover, 53"H x 42"W x 30"D▲WUC2BRStandard Wheeled FE Cover, 58"H x 52"W x 38"D▲WUC3BRStandard Wheeled FE Cover, 54"H x 16"W x 27"D▲WUC4BRHeavy-Duty Wheeled FE Cover, 53"H x 42"W x 30"D▲WUC5BRHeavy-Duty Wheeled FE Cover, 58"H x 52"W x 38"D▲WUC6BRHeavy-Duty Wheeled FE Cover, 54"H x 16"W x 27"D



WUC1BR



WUC3BR

FES3BR In Use

FMRGC In Use

FIRE EXTINGUISHER STANDS 14



FIRE EXTINGUISHER STAND

Ideal for temporary fire extinguisher placement—holds a 5, 10, or 20 lb dry chemical or clean agent units.

Part No

↑ FES1BR

- Steel construction
- 16" x 16" base w/ molded-in handle
- 21/2" fill hole
- Heavy-duty upright attaches easily to base (w/o tools)

Description Portable Stand

- Pre-drilled for fire extinguisher wall hook
- Holds 35 lb of sand (not included)
- Red powder-coated finish

PORTABLE EXTINGUISHER STAND

Stackable, and accommodates larger extinguishers.

NOTE: Includes two 1135WLLFSBR cabinet signs (for optional use).

- 8" x 8" recessed cup holds 5 lb-30 lb & 2.5 gal water units
- For indoor/outdoor use
- Meets OSHA construction & temporary extinguisher location requirements
- 32"H x 20½"W x 20½"D
- Red

Part No. Description FES3BR Extinguisher Stand

STACKABLE FIRE EXTINGUISHER STAND

Holds a 5, 10, or 20 lb extinguisher, and its wide base resists tipping.

Features

- HDPE plastic construction
- OSHA compliant
- 34"H x 21"W x 21"D w/ 8"H x 7½"W x 6"D recess
- Red

Part No Description FMRGC Extinguisher Stand

FIRE EXTINGUISHER CABINET STAND

Designed for use with the FGC26BR fiberglass cabinet to create a perfect match.

Features

- Pre-drilled for attaching cabinet
- 4 additional pre-drilled holes for permanent installation
- Hardware included
- 15½" base • 81/4" x 113/4" top surface
- Sand can be added for temporary placement (not included) Red

Part No Description

<u>∧</u> FES2BR Cabinet Stand

FIRE EXTINGUISHER CABINET/STAND COMBOS

Ideal for jobsites, project areas, or remote locations.

Features

- Made from rust/fade-proof materials
- Heavy-duty rubber base
- · Scored break front
- Cylinder lock
- Carry handle

• Informational decal

• 27½" tall

- Flame resistant
- Nestable
- 43"H x 20"W x 20"D
- White/Red

Description **Part No**

FGSWC10BR Combo Stand (For 10 lb Extinguisher) FGSWC20BR Combo Stand (For 20 lb Extinguisher)



FES2BR In Use

FIRE EXTINGUISHER CABINETS

FIBERGLASS EXTINGUISHER CABINETS


Durably constructed with a door-sealing method that's strong enough to keep out nature's harsh elements.

Features

- Corrosion-resistant handle
- Easy-view window
- UV resistant
- Hi-Vis Red



	Part No.	Part No. Description		B (Width)	C (Depth)	Max Extinguisher Height
⚠	FGC10BR	Small Cab	261/8"	13¼"	9¾"	23½"
Δ	FGC26BR	Medium Cab	271/8"	15¾"	10½"	24½"
Δ	FGC35BR	Large Cab	361/8"	19%"	14"	33"





FGC26BR

FIRE EXTINGUISHER CABINET MOUNTING HEIGHT

Mounting height requirements apply to extinguishers on

hangers, in cabinets, in strap-type brackets, and in the old-style wall recesses. The top of an extinguisher can't be more than 5 ft above the floor if the gross weight is 40 lb or less. Where an extinguisher gross weight exceeds 40 lb, the extinguisher is installed so the top is no more than 3.5 ft above the floor. In order to allow for cleaning under the extinguisher, and to prevent corrosion, no extinguisher should ever be on the floor, and the minimum mounting distance from the bottom of the extinguisher to the floor can't be less than 4 inches. The 4-inch clearance also ensures the extinguisher will be secure on a hanger and will not be easily dislodged by impact.

National Fire Protection Association. (2010). NFPA 10: Standard for Portable Fire Extinguisher - Installation Height. (6.1.3.8.1, 2014). Quincy, MA: National Fire Protection Association.






AMBASSADOR SERIES STEEL CABINETS

Available in surface mount, fully recessed (flat), and semi-recessed (1½" or 3" trim) models. **NOTE**: Add wall material thickness to wall depth when determining cabinet size (example: a standard 2" x 4" stud wall, with ½" sheetrock, would equal a 4" wall depth).

Features

- Continuous hinge door
- Double-strength door glass
- 11/4" face width trim & door
- Square edge construction (rolled edge on 3" trim model)
- Zinc-plated pull handle & roller catch (full-glass door)
- White epoxy finish



				0.000					
			Tub ID		Fram	e OD	Wa	all Openi	ng
Part No	Description	A	В	C	E	F	Н	w	D
1013F10JL	Surface Mount	27¾6"	1311/16"	6½"	273/8"	13%"	N/A	N/A	N/A
1013G10JL	Surface Mount w/ Lock	273/16"	1311/16"	6½"	27¾"	13%"	N/A	N/A	N/A
1015F10JL	Flat Trim	24"	10½"	6"	273/8"	13%"	25"	11½"	5%"
1017F10JL	3" Trim	24"	10½"	6"	27¾"	13%"	25"	11½"	31/8"
1017G10JL	3" Trim w/ Lock	24"	10½"	6"	27¾"	13%"	25"	11½"	31/8"
1815F10JL	Flat Trim	24"	10½"	5½"	27¾"	13%"	25"	11½"	53/8"
1816F10JL	1½" Trim	24"	10½"	5½"	273/8"	13%"	25"	11½"	41/8"
1816G10JL	1½" Trim w/ Lock	24"	10½"	5½"	273/8"	13%"	25"	11½"	41/8"
1817F10JL	3" Trim	24"	10½"	5½"	273/8"	13%"	25"	11½"	25/8"
1817G10JL	3" Trim w/ Lock	24"	10½"	5½"	27¾"	13%"	25"	11½"	25/8"
2015F10JL	Flat Trim	27"	12"	7¾"	30%"	15%"	28"	13"	75/8"

16 | FIRE EXTINGUISHER CABINETS



916LSJL In Use

BGH6BR

CARBR





916FTBR In Use



BUBBLE1BR In Use



CLASSIC SERIES METAL EXTINGUISHER CABINETS

An economical choice for fire extinguisher protection in a durable, surface-mount design.

Features

- Made of 20 ga galvanized steel
- White powder coat finish
- White powder coat finish
 Keyed-alike cylinder lock
- Polystyrene breakfront
- White

Part No Description

 916LSJL
 Cabinet, 19½6"H x 8½"W x 6½"D

 926LSJL
 Cabinet, 25½"H x 9½"W x 6½"D

 936LSJL
 Cabinet, 29½"H x 10½"W x 8½"D

916SACBRClear Scored Front (For Metal Cabinets), 17%" x 8"926SACBRClear Scored Front (For Metal Cabinets), 23%" x 9"936SACBRClear Scored Front (For Metal Cabinets), 27%" x 10"BGH6BRBreak Glass Striker w/ Chain (Hammer Style)

METAL EXTINGUISHER CABINETS

Rugged and rust resistant—keeps the elements outside.

Features

- Made of 20 ga galvanized steel
- Polystyrene breakfront w/ labels
- Keyed alike cylinder lock
- White

Part No Description

 916FTBR
 Cabinet, 1913/6"H x 8½"W x 6½"D

 926FTBR
 Cabinet, 25½"H x 9½"W x 6½"D

 936FTBR
 Cabinet, 29½"H x 10½"W x 8½"D

916SACBRClear Scored Front (For Metal Cabinets), 17%" x 8"926SACBRClear Scored Front (For Metal Cabinets), 23%" x 9"936SACBRClear Scored Front (For Metal Cabinets), 27%" x 10"BGH6BRBreak Glass Striker w/ Chain (Hammer Style)

BUBBLE COVERS

Fits JL metal extinguisher cabinets with full door styles.

Features

Transparent

• Extra strong (polycarbonate model)

Part No Description

 BUBBLE1BR
 Acrylic Cover, 22½"H x 8½"W x 4"D

 BUBBLE2BR
 Acrylic Cover, 28"H x 11½"6"W x 5"D

 BUBBLE3BR
 Poly Cover, 22½"H x 8½"W x 4"D

 BUBBLE4BR
 Poly Cover, 28½"H x 11½"6"W x 5"D

CABINET ALARMS

Sounds a high-decibel alarm with extinguisher removal.

Features

Self-adhesive105 dB alarm

• Uses (1) 9V battery (not included)

• Red

• 2¾"H x 2¼"W x 1"D

Part No Description

CARBR Cabinet Alarm, Red
CAWBR Cabinet Alarm, White

▶ 9VBPRB Power Rite 9V Alkaline Battery

THEFT STOPPER EXTINGUISHER ALARM

Sounds a loud, instantaneous alarm when a protected fire extinguisher is moved or jostled.

Features

- Highly visible "Stop, Alarm Will Sound" warning label
- Includes deactivation cable

Part No Description
STI6200BR Theft Stopper Alarm



FIRE EXTINGUISHER CABINETS

MARK SERIES ABS EXTINGUISHER CABINETS

Low cost with plenty of extinguisher room and won't dent, rust, or corrode.

Features

- Injection-molded, high-impact ABS construction
- Unique design eliminates breaker bar & broken glass
- Nestable

Mark I Jr. Cabinet

Part No	Location	Description
Part NO	Location	Description
MJMBR	Indoor/Outdoor	Mark I Jr. Red Tub w/ Red Cover
MJRCBR	Indoor	Mark I Jr. Red Tub w/ Clear Cover
MJWCBR	Indoor	Mark I Jr. White Tub w/ Clear Cover
MJWRBR	Indoor	Mark I Jr. White Tub w/ Red Cover
MJCBR		Cabinet Cover (For Mark I Jr.), Clear
MJCRBR		Cabinet Cover (For Mark I Jr.), Red

Mark II Jr. Cabinet

Part No	Location	Description
M2JMBR	Indoor/ Outdoor	Mark II Jr. Red Tub w/ Red Cover
M2JRCBR	Indoor	Mark II Jr. Red Tub w/ Clear Cover
M2JWCBR	Indoor	Mark II Jr. White Tub w/ Clear Cove
M2JWRBR	Indoor	Mark II Jr. White Tub w/ Red Cover
M2JCBR		Cabinet Cover (For Mark II Jr.), Clea
M2JCRBR		Cabinet Cover (For Mark II Jr.), Red


Mark II Cabinet

Part No	Location	Description
M2MBR	Indoor/ Outdoor	Mark II Red Tub w/ Red Cover
M2RCBR	Indoor	Mark II Red Tub w/ Clear Cover
M2WCBR	Indoor	Mark II White Tub w/ Clear Cover
M2WRBR	Indoor	Mark II White Tub w/ Red Cover
M2CBR		Cabinet Cover (For Mark II), Clear
M2CRBR		Cabinet Cover (For Mark II), Red

FIRE EXTINGUISHER CABINETS SIZING CHART						
Cabinet	A (Height)	B (Width)	C (Depth)	Max Extinguisher Height		
Mark I Jr. Series	18¼"	8½"	5%"	16¾"		
Mark II Jr. Series	21¾"	9%"	63/8"	20"		
Mark II Series	25¾"	9%"	63/8"	24"		

(L- R III)

MJWCBR In Use





17

M2JRCBR In Use





FT101BR In Use

ABS EXTINGUISHER CABINET

Super-sleek and highly durable—perfect for protecting fire extinguishers or life safety equipment in harsh environments.

• Red tub, clear door

• 29%"H x 10%"W x 8½"D

Features

- Polycarbonate construction
- Door seat for long-term weather protection
- Quick-release catch

Part No Description FT101BR ABS Cabinet

MOLDED HDPE EXTINGUISHER CABINETS

Provides tough wall-mount storage and protection with windows for easy inspection.

Feature

- Fitted with weather-/insect-/dust-resistant doors
- Internal, easy-release straps hold extinguishers in place
- Black/Red

Part No Description

RMC26BR Medium Molded HDPE Extinguisher Cabinet, 27%"H x $11^{13}\%$ 6"W x $9^{29}\%$ 2"D **RMC26WBR** Medium-Wide Molded HDPE Extinguisher Cabinet, 28%"H x 21%"W x 10%"D

RMC31BR Tall Molded HDPE Extinguisher Cabinet, 32%"H x 12%6"W x 10%6"D



RMC26BR

M2FBCBR

ESCAPE LADDERS & FIRE BLANKETS 18



ESCAPE LADDERS

Deploys in seconds.

Features

- Attaches to most common windows
- Tangle-free
- Anti-slip rungs
- Supports up to 1000 lb

No assembly required

- Flame resistant
- 5-year limited warranty

Part No **Description** 468093K 2-Story Ladder, 13' 468094K 3-Story Ladder, 25'

ABS FIRE BLANKET CABINET & ACCESSORIES

Easy to mount. Easy to access.

Features

- High-impact, flame-resistant, ABS cabinet
- 80" x 56" fire retardant wool blanket
- Includes brass lock, cover, & decals
- Red/Clear

Part No Description

Fire Blanket & Cabinet **M2FBCBR**

M2RFCBR Fire Blanket Cabinet (Tub Only)

M₂CBR Clear Cover w/ "Pull Here" Label (For M2FBCBR)

25MMBR Cabinet Lock (For M2FBCBR)

650200BR Fire Blanket (Only)

WOOL BLANKET & VINYL BAG

Accessible and protective solution to fire blanket storage.

650204BR

- Blanket measures 80" x 56"
- Hook-&-loop closure
- 4 brass-grommeted mounting holes
- 16"L x 12"W x 5½"D

Part No Description

650204BR Fire Blanket Bag (Only) 650200BR Fire Blanket (Only)

STEEL CABINET & FIRE BLANKET

"Drop-type" convenience.

Features

- All-steel construction
- Tailgate-style door w/ push handle
- Red

• 10"H x 16"W x 7½"D

Part No Description 650207JL Steel Cabinet (Only) Fire Blanket (Only) 650200BR

FIBERGLASS FIRE BLANKET WITH CASE

Low-profile with super-quick deployment.

Features

- Pastic case
- Pull straps
- Instruction labels
- Case measures 141/4"H x 61/4"W x 11/2"D
- Blanket measures 72" x 48"

• Blanket meausres 80" x 56"

• Single use

Part No **Description** 650203RR Blanket w/ Case

INSPECTA-SHIELD™ FIRE RETARDANT

Designed to slow down Class A horizontal and vertical flame spreads. **NOTE**: UL Letter of Certification can be granted up to two years after the manufacture date. Does not prevent charring. Not recommended for outdoor use.


Features

- Pre-mixed for easy application
- Non-toxic, non-allergenic, colorless, & odorless (when dried)
- Directions included

Part No Description

Fire Retardant, 1 gal **∆SFRQT** Fire Retardant, 1 qt Spray







650200BR



650203BR

SFRQT

FIRE HOSE & NOZZLES

RACK & REEL FIRE HOSE

Pre-folded for easy installation on pin racks. **NOTE**: For emergency use only.

Features

- Fully lined
- Brass coupled
- Pressure ratings: 500 psi (proof test), 250 psi (service test)
- FM approved

Part No	Description	Size
▲50NPSHFT	R&R Hose, Brass NPSH	1½" x 50'
∆ 50NSTFT	R&R Hose, Brass NST	1½" x 50'
▲75NPSHFT	R&R Hose, Brass NPSH	1½" x 75'
^ 75NSTFT	R&R Hose, Brass NST	1½" x 75'
▲100NPSHFT	R&R Hose, Brass NPSH	$1\frac{1}{2}$ " x 100'
▲ 100NSTFT	R&R Hose, Brass NST	$1 \frac{1}{2}$ " x 100'

POLYCARBONATE FIRE HOSE NOZZLES

Unlike brass versions, these are virtually vandal proof.

Features

- Fully adjustable
- Red

Adjustable Fog Nozzles

For Class A and B fires.

Part No	Description
▲10IPTBR	Nozzle, Fog/Stream/Shutoff, 1" NPSH, 30 gpm

10NSTBR Nozzle, Fog/Stream/Shutoff, 1" NST, 30 gpm 15IPTBR Nozzle, Fog/Stream/Shutoff, 11/2" NPSH, 78 gpm 15NSTBR Nozzle, Fog/Stream/Shutoff, 11/2" NST, 78 gpm Nozzle, Fog/Stream/Shutoff, 21/2" NST, 210 gpm 25NSTBR

2520NSTBR Nozzle, Fog/Stream/Shutoff w/ Handles, 21/2" NST, 150 gpm

10GBR Gasket (For 1" NST Nozzles)

All-Fog Nozzles

For Class A, B, & C fires.

Part No Description

E15IPTBR Nozzle, Fog/Shutoff Only, 11/2" NPSH, 78 gpm E15NSTBR Nozzle, Fog/Shutoff Only, 11/2" NST, 78 gpm

BRASS ADJUSTABLE FOG NOZZLES

Nozzles are fully adjustable and precision machined for optimum performance straight stream through full fog and shutoff.

Features

- UL listed for Class A and B fires
- FM approved
- 106 gpm
- Forged brass construction

Part No Description Nozzle, 1½" NST **∧N113BR 1113BR** Nozzle, 1½" NPSH

PIN RACK NIPPLE

For supporting and maintaining hose rack assemblies.

Features

 Forged brass construction. **Part No** Description

∧N311BR Nipple, 1½" NPT x 1½" NST













FIRE HOSE STORAGE DEVICES 20



HDR19BR

LOWER HANGER (FIXED)

FHRC18BR

In Use

ECONOMY HOSE REELS

Increased reliability at a reduced price point.

- 14 ga steel wall bracket
- 180° swing

Rack Hose	SJ Hose	DJ Hose	Hose Dia	L	н	v

Part No	Description	Rack Hose	SJ Hose	DJ Hose	Hose Dia	L	Н	w
FHRBR	18" Hose Reel	100'	75'	-	1½"	23½"	18"	61/4"
FHR24BR	24" Hose Reel	150'	100'	-	1½"	29"	24"	61/4"

• Red

HEAVY-DUTY HOSE REELS

Featuring a more robust design for maximum durability.

Features

- Solid 16 ga steel sides & hubs
- \bullet 1" x $\frac{3}{16}$ " welded steel reel brackets
- 1½" x ¼" steel wall bracket w/ 180° swing
- Hook-&-loop back strap (to secure hose)
- Red

Part No	Description	Rack Hose	SJ Hose	DJ Hose	Hose Dia	L	Н	w
HDR19BR	19" Reel	100'	75'	50'	1½"	23¾"	19"	5¾"
HDR25BR	25" Reel	150'	100'	75'	1½"	30"	25"	5¾"
HDR25HCBR	25" Reel (High Capacity)	300'	200'	150'	1½"	30"	25"	8¾"
		150'	100'	75'	2½"			874

UPPER HANGER (SPRING LOADED) HANGER SPACING (SEE TABLE) **THHFT**

HOSE HANGER

Featuring aluminum alloy construction, this hanger easily holds 100' of lined or unlined fire hose, up to 2½".

- Spring loaded top shoulder
- Mounting instructions included

Description THHFT Hanger

	2
50'	12
75'	-
100	

	2	3	4
50'	12'	8'	6"
75 '	-	12'	9"

TOTAL LOOPS OF HOSE

HOSE RACK COVERS

Protects rack assemblies from dirt, grime, and unauthorized tampering.

HOSE ENGTH

Features

- Vinyl construction
- Hook-&-loop closure
- Hi-Vis Red

Description **Part No** LXHXW Rack Cover (For Hump Rack) **∧ HRC2BR** 34" x 28½" x 6¼" **^RC25BR** Rack Cover (For Pin Rack) 21" x 24" x 5" **∧RC25LBR** Rack Cover (For Pin Rack) 21" x 30" x 5" **∧RC32BR** Rack Cover (For Pin Rack) 32" x 24" x 6"




In Use

Offers a custom, protective fit.

- Vinyl construction
- Hook-&-loop closure
- Red

Part No Description LXHXW **▲FHRC18BR** Reel Cover 20" x 19" x 5" **▲FHRC24BR** Reel Cover 26" x 25" x 5" **▲FHRC24DWBR** Reel Cover 26" x 25" x 8"

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.



HAND TOOLS & FIRE HOSE FITTINGS

MUNICIPAL HAND TOOLS

A wide assortment, including all of the popular sizes and styles in both storz and threaded adapters (pin or rocker lugs).

Features

• **STWBR** fits 4"-6" storz & 1½"-3" rocker lugs


• W570BR fits 1½"-3" pin/rocker lugs

• W580BR & W575BR fit 1½"-6" pin/rocker lugs • AFSBR fits pin/rocker lugs thru 4"

Description Part No

AFSBR Folding Pocket Spanner, Plastic K48BR Hydrant/Spanner Holder (Only) **STWBR** Storz x Universal Spanner, Aluminum

W570BR Universal Spanner, w/ Gas Shutoff Wrench, Aluminum W575BR Heavy-Duty Hydrant Wrench/Spanner, Steel/Ductile Iron W580BR Standard Hydrant Wrench/Spanner, Steel/Ductile Iron







FEMALE X MALE BRASS HEXAGON ADAPTERS

Used to change threads.

Features

• Rigid hexagon design

• Cast brass

Part No Description

111BR Hex Adpt, 1½" PCT(F) x 1½" NST(M) **↑**712BR Hex Adpt, 11/2" NPT(F) x 11/2" NST(M) ↑713BR Hex Adpt, 11/2" NST(F) x 11/2" NPT(M) Hex Adpt, 11/2" NPSH(F) x 11/2" NST(M) Hex Adpt, 2½" NST(F) x 2½" NPT(M)



Used to change threads or size.

Features

• Pin lug design

Cast brass

Part No Description

↑721BR Reducer, 2½" NST(F) x 1½" NST(M) Reducer, 21/2" NPSH(F) x 11/2" NST(M) **↑**724BR Reducer, 2½" NST(F) x ¾" GHT(M) Reducer, 2½" NST(F) x 1½" NPSH(M)

MALE X MALE BRASS HEXAGON NIPPLE

Used to change configuration, threads, or size.

Features

• Rigid hexagon design Made of cast brass

Part No **Description**

<u>^</u>731BR Hex Nipple, 1½" NPT(M) x 1½" NST(M)

FEMALE X MALE BRASS HEXAGON BUSHING

Used to change threads or size.

Features

• Rigid hexagon design

• Made of cast brass

Part No Description

Hex Bushing, 2" NPT(F) x 21/2" NST(M)



W570BR





711BR



721BR



731BR




751BR



ALARMS 22

Home Safety Product Placement Guide

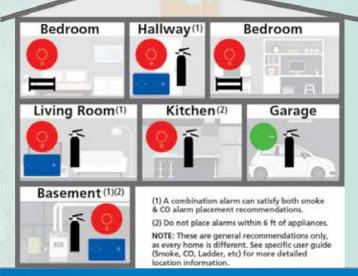



Kidde. (2020). Home Safety Product Placement Guide. Retrieved from https://www.kidde.com/home-safety/en/us/products/.



WORRY-FREE DC SMOKE/CO COMBO ALARM - PHOTOELECTRIC

Ten years of worry-free protection against fire and CO. NOTE: Cannot ship to AK, HI, PR, or Catalina.

• Sealed lithium battery

• 51/4" x 15/8" • 1 lb

• Auto-adjusting sensitivity & self-activating

• 85 dB at 10'

• 10-year warranty

Part No Description

21010170 DC Smoke/CO Unit, Sealed Lithium

NOTE: Cannot ship to AK, HI, PR, or Catalina.





• 120 VAC w/ sealed lithium battery

ALARM - IONIZATION

Offers 10 years of worry-free protection against fire with voice warnings and intelligent

• Electrochemical sensor

• 1 lb

• 85 dB at 10'

sensor technology.

• 10-year warranty

• 5½" x 1¾"

Part No Description

WORRY-FREE AC/DC SMOKE/CO COMBO

21010408

AC/DC Smoke/CO Unit w/ Sealed Lithium Backup

DC SMOKE/CO COMBO ALARM – IONIZATION

Adjusts its smoke sensitivity to better discriminate between a real hazard and a false one.

Features

• 2 AA batteries

• 5¾" x 111/16"

Electrochemical sensor

• 13 oz

• 85 dB at 10'

• 10-year warranty

Part No Description

9000216 **AABPRB**

DC Combo Unit, 2AA Alkaline Power Rite AA Alkaline Batteries, 4/Pkg

Batteries Included w/ All "DC & AC/DC" Units

9000216



AC/DC SMOKE/CO COMBO ALARM - PHOTOELECTRIC

Emits beeping tone followed by voice warning ("Fire! Fire!" or "Warning! Carbon Monoxide!").

Features

- 120 VAC w/ 9V battery backup
- Electrochemical sensor
- 85 dB at 10'
- Quick-connect plug w/ 8" pigtails

Part No Description

21007624 AC/DC Smoke/CO Unit w/ 9V Battery Backup

△9VBPRB Power Rite 9V Alkaline Battery



- 1 lb
- Interconnects up to 24 Kidde devices (18 initializing)
- 10-year warranty



Voice Warning

Warns of hazard by announcing "Fire, Fire" or "Warning, Carbon Monoxide."

Peak Level Memory

Alerts user when the unit has detected CO concentrations of 100 PPM or higher.

Smart Hush

Silences the unit during nuisance alarm situations. (Smoke must be present before hush is activated.)

Two LEDs

- Red: Alarm mode.
- Green: Indicates that AC power is present.

Front-Load Battery Door

Adjustable Mounting Bracket

Allows for easy installation and alignment.

DIRECT PLUG-IN GAS/CO COMBO ALARM

Plugs into any AC wall outlet via direct-plug or with its hide-a-way 6' power cord.

Features

- 120 VAC
- Electrochemical sensor
- Detects natural gas (methane), propane, & CO
- Displays CO concentration in PPM
- 85 dB at 10'

Part No Description

9000113 AC/DC Combo Wall Unit w/ 9V Battery Backup

△9VBPRB Power Rite 9V Alkaline Battery

• 61/10"H x 313/16"W x 113/16"D

- 1.5 lb
- 5-year warranty
- CSA listed





9000102



NIGHTHAWK

SMOKE/CO COMBO ALARMS – IONIZATION

Technologically advanced with a voice warning system that announces "Fire, Carbon Monoxide, Low Battery, or Smart Hush" activation."

Features

- 2 AA batteries
- 9000102 fuel cell sensor, 21006377 electrochemical sensor
- 21006377 interconnects up to 24 Kidde devices (18 initiating)
- 85 dB at 10'
- 5¾" x 1¹¹¼6"
 10-year warranty
- UL listed

Part No Description

9000102 DC Voice Alert Smoke/CO Unit, 2AA Alkaline

21006377 AC/DC Voice Alert Smoke/CO Unit w/ 2AA Battery Backup

▲ AABPRB Power Rite AA Alkaline Batteries, 4/Pkg



21006377



24 | ALARMS





WORRY-FREE DC SMOKE ALARMS – PHOTOELECTRIC

Fully automatic and activates when attached to its mounting bracket. **NOTE**: Cannot ship to AK, HI, PR, or Catalina.

Features

- Sealed lithium battery
- 21010164 fully automatic
- 85 dB at 10'
- 51/4" x 15/8"
- 1 lb
- 10-year warranty

Part No Description

21010167 DC LED Safety Light Smoke Unit, Sealed Lithium

21010164 DC Smoke Unit, Sealed Lithium

WORRY-FREE AC/DC SMOKE ALARM – IONIZATION

Offers 10 years of worry-free protection against fire. **NOTE**: Cannot ship to AK, HI, PR, or Catalina.

Features

- 120 VAC w/ sealed lithium battery
- Interconnects w/ up to 24 **Kidde** devices (18 initiating)
- 85 dB at 10'
- 5½" x 1¾"
- 7 oz
- 10-year warranty

Part No Description

21010407 AC/DC Smoke Unit w/ Sealed Lithium Backup

DID YOU KNOW?

- In 2020, local fire departments responded to an estimated 1.4 million fires in the United States. These fires caused 3,500 civilian fire deaths and 15,200 reported civilian fire injuries. Property damage was estimated at \$21.9 billion.¹
- Almost 3 out of 5 home fire deaths were caused by fires in properties with no smoke alarms or smoke alarms that failed to operate.²

¹Ahrens, M. and Evarts, B. (2021, September). Fire Loss in the United States During 2020. Retrieved from https://www.nfpa.org//-/media/Files/News-and-Research/Fire-statistics-and-reports/US-Fire-Problem/osFireLoss.pdf.

²Ahrens, M. (2021, February). Smoke Alarms in US Home Fires. Retrieved from https://www.nfpa.org/News-and-Research/Data-research-and-tools/Detection-and-Signaling/Smoke-Alarms-in-US-Home-Fires.



WIRELESS SMOKE ALARMS - IONIZATION

Expands coverage of a current interconnected system.

Features

- 85 dB at 10'
- Interconnects w/ up to 24 **Kidde** devices (18 initiating)
- 5¾" x 1¼"
- 8 oz
- 10-year warranty

Part No Description

0919 DC Smoke Unit, 3AA Alkaline

AABPRB AC/DC Smoke Unit w/ 9V Battery Backup

Power Rite AA Alkaline Batteries, 4/Pkg

△9VBPRB Power Rite 9V Alkaline Battery



INTERCONNECTABLE SMOKE ALARMS – IONIZATION

Operates as a single unit or interconnected with up to 24 Kidde devices (18 can be initiating).

Features

- 120 VAC w/ 9V battery backup
- 85 dB at 10'
- 10-year warranty

Part No Description

21006376 AC/DC Smoke Unit, Front-Loading Battery Door, Smart Hush, Silent Hush,

Alarm Memory

21006378 AC/DC Smoke Unit, Smart Button, Smart Hush, Alarm Memory

21006379 AC/DC Smoke Unit, Exit Light, Smart Hush, Silent Hush, Alarm Memory

21007582 AC/DC Smoke Unit, Front Loading Battery Door, Smart Hush, Silent Hush, Alarm

Memory, 360° Mounting Plate

4 9 VBPRB Power Rite 9V Alkaline Battery



21006376



21006379

KIDDE

DID YOU KNOW? Smoke alarms save lives. If there is a fire in your home, smoke spreads fast and you need smoke alarms to give you time to get out. Having a working smoke

alarm cuts the chances of dying in a reported fire in half. Almost two-thirds of home fire deaths resulted from fires in homes with no smoke alarms or no working smoke alarms.

- 1) Install smoke alarms inside and outside each bedroom and sleeping area. Install alarms on every level of the home. Install alarms in the basement.
- 2) It is best to use interconnected smoke alarms. When one smoke alarm sounds they all sound.
- 3) Test all smoke alarms at least once a month. Press the test button to be sure the alarm is working.
- 4) Replace all smoke alarms when they are 10 years old.

National Fire Protection Association. (2018). Installing and Maintaining Smoke Alarms. Retrieved from https://www.nfpa.org/ Public-Education/By-topic/Smoke-alarms/Installing-and-maintaining-smoke-alarms.

DC SMOKE ALARMS – IONIZATION

For continuous protection—even during a power outage.

Features

- 9V battery
- 85 dB at 10'
- UL listed

Part No Description

0914 Fire Sentry Smoke Unit w/o Plate, 9V Alkaline, 4", 3-Year Warranty 0914E Fire Sentry Smoke Unit w/ Plate, 9V Alkaline, 4", 3-Year Warranty 0915E Tamper-Resistant Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Box 440374 Tamper-Resistant Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Clam

0916E Hush Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Box 440375 Hush Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Clam 0918E Exit Light Smoke Unit, (2) 9V Alkaline, 5", 10-Year Warranty

0976E Front-Loading Battery Door, Smoke Unit, 9V Alkaline, 5", 10-Year Warranty

∮9VBPRB Power Rite 9V Alkaline Battery

0914E

SEALED BATTERY DC SMOKE ALARM – IONIZATION

Automatically activates when attached to mounting bracket.

NOTE: Cannot ship to AK, HI, PR, or Catalina.

Features

- 10-year lithium battery
- 85 dB at 10'
- 5½" x 111/16"
- 8 oz
- 10-year warranty
- UL listed

Part No Description

9000136 DC Smoke Unit, Sealed Lithium



9000136



26 ALARMS



KIDDE







Batteries Included w/ All "DC & AC/DC" Units

RECREATIONAL VEHICLE DC SMOKE **ALARM – IONIZATION**

Designed for motorhomes and RVs.

Features

- 9V battery
- Tamper-resistant locking pin
- 85 dB at 10'
- 10-year warranty
- RV listed

Part No Description

21007547 RV DC Smoke Unit, 9V Alkaline Power Rite 9V Alkaline Battery **№9VBPRB**

FIREX® 14618 AC/DC SMOKE **ALARM – IONIZATION**

Designed for quick battery exchange and interconnects with up to 24 Kidde devices (18 initiating).

Features

- 120 VAC w/ 9V battery backup
- 85 dB at 10'
- 8 oz
- 5-year warranty

Part No. Description

Firex AC/DC Smoke Unit w/ 9V Battery Backup 21007581

4 9 VBPRB Power Rite 9V Alkaline Battery

DUAL SENSOR SMOKE ALARMS

Featuring both ionization and photoelectric sensing technology, these units also include flashing LEDs to signal they are functioning properly.

- Flashing LEDs to signal functioning properly
- Low-battery warning
- 85 db at 10'
- 5¾" x 1¹³/₁₆"
- UL listed
- 10-year warranty

Part No Description

21007915 AC/DC Combo Sensor Smoke Unit w/ 9V Battery Backup

442007 DC Combo Sensor Smoke Unit, 9V Alkaline

♦9VBPRB Power Rite 9V Alkaline Battery

SMOKE ALARMS – PHOTOELECTRIC

Provides continuous protection and interconnects with up to 24 Kidde devices.

Features

- 9V battery
- 85 dB at 10'
- 10-year warranty

Part No Description

21006371 AC/DC Quick-Connect Smoke Unit w/ 9V Battery Backup

PF9F DC Tamper-Resistant Smoke Unit, 9V Alkaline

4 9 VBPRB Power Rite 9V Alkalin Battery



ULTRA-SENSITIVE CO MONITOR

Provides audible and visual notification of CO levels below 30 PPM—even during power outages.

- Shows continuous digital readings as low as 10 PPM and updates them every 15 seconds
- 3 AA batteries
- 85 db at 10'
- 4½"L x 2¾"W x 1½"D
- 10-year warranty

Part No

21009942 DC Ultra-Sensitive Smoke Unit, 3AA Alkaline **^AABPRB** Power Rite AA Alkaline Batteries, 4/Pkg



21009942

PLUG-IN AC/DC CO ALARM WITH **DIGITAL DISPLAY**

Monitors CO levels constantly—even during power outages.

Features

- 120 VAC, 60 Hz w/ 2 AA battery backup
- Electrochemical sensor
- Displays CO concentration in PPM
- Rotating AC blades
- 85 dB at 10'
- 5%"L x 3"H x 1½"W
- 10 oz
- 10-year warranty

Part No Description

9000278 AC/DC CO Unit w/ Display w/ (2) AA Battery Backup

AABPRB Power Rite AA Alkaline Batteries, 4/Pkg



9000278

WORRY-FREE DC CO ALARMS

Continuous protection against elevated levels of CO for 10 years. NOTE: Cannot ship to AK, HI, PR, or Catalina.

Features

- Sealed lithium battery
- Electrochemical sensor
- Self-activating
- 85 dB at 10'
- 4½"L x 2¾"H x 1½"D
- 5 oz
- 10-year warranty

Part No Description

21010047 DC CO Unit w/ Display, 10-Year Lithium

21010045 DC CO Unit, 10-Year Lithium

Kidde 21010047

9CO5-LP DC CO ALARM

Provides continuous monitoring of CO levels—even during power outages.

Features

- 2 AA batteries
- Electrochemical sensor
- Includes multiple mounting options: wall or table top
- 85 dB at 10'
- 4½"L x 2¾"H x 1½"D
- 8 oz
- 10-year warranty

Description **Part No**

9C05 DC CO Unit, 2AA Alkaline

Power Rite AA Alkaline Batteries, 4/Pkg **AABPRB**



ALARMS 28



9000146-LP DC CO ALARM

Monitors CO levels constantly—even during power outages.

Features

- 3 AA batteries
- Electrochemical sensor
- Displays CO concentration in PPM
- 85 dB at 10'
- 4½"L x 2¾"H x 1½"D
- 8 oz
- 10-year warranty

Part No Description

9000146 DC CO Unit w/ Display, 3AA Alkaline **∧** AABPRB Power Rite AA Alkaline Batteries, 4/Pkg





WORRY-FREE DIRECT PLUG-IN AC/DC CO

Continuous protection against elevated levels of CO for 10 years. NOTE: Cannot ship to AK, HI, PR, or Catalina.

- Sealed lithium battery
- Electrochemical sensor
- Rotating AC blades
- 85 dB at 10'
- 5%"H x 3"H x 1½"D
- 10 oz
- 10-year warranty
- UL listed

Part No Description

9000280 AC/DC Wall Unit w/ Display, 10-Year Lithium



9000076



21025759

DIRECT PLUG-IN AC/DC CO ALARMS

Reliable protection with plug-in simplicity.

Features

- 120 VAC
- Electrochemical sensor
- 9000076 displays CO concentration in PPM
- 85 dB at 10'
- UL listed

Part No Description

21025759 AC/DC Tamper-Resistant CO Wall Unit w/ (2) AA Battery Backup

9000076 AC/DC CO Wall Unit w/ Display w/ 9V Battery Backup

▲AABPRB Power Rite AA Alkaline Batteries, 4/Pkg

♠9VBPRB Power Rite 9V Alkaline Battery

ALARMS & ACCESSORIES

WIRE-IN AC/DC CO ALARM

Interconnects with up to 24 Kidde devices.

Features

- 120 VAC w/ 9V battery backup
- Electrochemical sensor
- 85 dB at 10'
- 5¾" x 1¹³/₁₆"
- 1 lb

• 10-year warranty

Part No Description

21006406 AC/DC CO Unit w/ 9V Battery Backup

△9VBPRB Power Rite 9V Alkaline Battery



21006406

AC/DC HEAT DETECTOR WITH THERMAL SENSORS

Responds to temperature, not smoke.

Features

- Test button tests electronic circuitry, horn, & battery function
- Quick connect power harness
- Activates above 135°F
- Interconnects w/ up to 24 devices
- 120 VAC w/ 9V battery backup
- UL listed

Part No Description

HD135F AC/DC Heat Detector w/ 9V Battery Backup

△9VBPRB Power Rite 9V Alkaline Battery



HD135F



DUAL MODE AC LED STROBE LIGHT

Ideal for the hearing impaired protection when used in conjunction with a smoke, heat, or carbon monoxide alarm.

Features

- Bright LED signal
- Tamper-resistant pin
- 120 VAC
- 10-year warranty

Part No Description

SL177I AC Smoke/CO Strobe Unit



SL177I

ALARM ACCESSORIES

Part No Description

 SM120X
 Relay Module (For Smoke Alarm)

 C0120X
 Relay Module (For CO Alarm)

 SAGBR
 Smoke Alarm Guard



30 **ALARM ACCESSORIES**

SMOKESABREBR





25SBR



SMOKE SABRE™ SMOKE DETECTOR TESTER

Tests smoke detectors quickly and easily—more tests per can with the lowest cost per test.

Features

- Uses silicone-free "smoke"
- 2.6 oz aerosol

Part No Description

∧ SMOKESABREBR Smoke Tester

FIRETECH™ CANNED SMOKE

Ideal for checking the functionality of smoke alarms, in the widest possible range.

Features

DANGER

FTS2BR

- Simple-to-use format—handheld or w/ dispenser
- Silicone-free w/ no CFCs
- Low GWP propellant
- UL/ULC listed
- 2.6 oz aerosol

Description **Part No ↑FTS2BR** Canned Smoke

SMOKE DETECTOR TESTER

Environmentally friendly—works great on both ionization and photoelectric smoke alarms.

Features

- Non-toxic
- 2.5 oz aerosol

Part No Description

^25SBR Detector Tester

CLEAN JET 100 CANNED AIR

Ultra-clean and powerful for precise removal of dirt, dust, lint, and other particulates.

NOTE: See manufacturer label for complete product information.

- Delivers air blasts up to 100 psi (at 68°F)
- Non-flammable
- Leaves no residue
- 10 oz aerosol
- 12/Case

Part No Description Canned Air

∧SW805SY



EXIT & EMERGENCY LIGHTING

RED LED EXIT SIGNS

Clearly marks the way out in emergencies and power outages.

- High-impact thermoplastic housing
- Flame retardant
- Solid-state charger
- Universal mounting
- Test button
- Low-voltage disconnect

Part No Description

↑ 104EE Exit Sign, AC (Only) Exit Sign w/ Battery Backup

- LED indicator
- Replaceable pop-out chevrons
- 120/277 VAC
- 12¾"L x 7½"H x 1¾"W
- 5-year warranty
- White



STEEL & ALUMINUM EXIT SIGNS

Includes LED lighting, solid-state chargers, push-to-test switches, and "ON" LED indicators.

Features

- 107EE w/ knockout cheverons
- 109EE w/ self-adhesive chevrons
- Solid-state chargers • Push-to-test switches
- "ON" LED indicators

Part No Description

107EE Red LED Exit Sign w/ Battery Backup, Steel Enclosure, 12½"L x 8%"H x 2"W **▲ 109EE** Red LED Edge Lit Exit Sign, Aluminum Canopy, 13¾"L x 11"H x 1¾"W

• UL listed for damp locations

- 120/277 VAC
- 5-year warranty
- Red/White



107EE

LITHONIA EXIT SIGN


Constructed with flame-resistant thermopalstic in a snap-together design.

Features

- Spare faceplate for double-face conversion
- Universal mounting kit
- Knockout chevrons
- UL listed for damp locations Description

Part No

Red LED Exit Sign w/ Battery Backup



- 5-year warranty
- Red/White



112EE

LOW-PROFILE EMERGENCY LIGHTS

Constructed with high-impact thermoplastic housings.

Features

- Universal mounting
- "EZ" quick connects
- Push-to-test switches
- Solid-state chargers
- Low-volatage disconnects
- Power-on LED indicator light

Part No Description

↑BLEDR1BR Emergency Light, 3.6V, 2 W LED, 14%"L x 3¾"H x 3¾"W, White Emergency Light, 6V, 10.8 W, 16"L x 51/8"H x 47/8"W, White **▲114EE** Emergency Light, 6V, 10.8 W, 16"L x 51/8"H x 47/8"W, Black **115EE** Emergency Light, 6V, 22 W, 16"L x 51/8"H x 47/8"W, White



• 115EE has remote capabilities (up to 11 lamp watts)

• UL or ETL listed for damp locations

• 120/277 VAC

• 5-year warranty



EXIT & EMERGENCY LIGHTING 32



118EE

EMERGENCY LIGHTS

Fully adjustable, glare-free dual lighting heads are standard.

- Flame-resistant, high-impact thermoplastic housing
- Push-to-test switches
- Solid-state chargers
- Low-voltage disconnects
- Power-on LED indicator light
- UL listed for dry locations
- 120/277 VAC
- •12¾"L x 14¾6"H x 3¼"W
- 5-year warranty
- White

Part No Description

<u>∧</u>118EE Emergency Light, 6V, 50 W **↑ 119EE** Emergency Light, 12V, 50 W



131EE

LITHONIA LED EMERGENCY LIGHTING UNIT

Unique UV-stablized thermoplastic housing that resists discoloration.

Features

- LED lamps
- Track-and-swivel design
- Wall or ceiling mounting
- UL listed for damp locations
- 120/277 VAC
- 101/4"L x 41/4"H x 23/4"W
- 5-year warranty
- White

Part No Description

LED Emergency Lighitng Unit, 3.6V, 3 W



142EE

CEW11 EMERGENCY LIGHT

Completely self-contained with a low-profile design.

Features

- Pusth-to-test switch
- Solid-state charger
- Low-voltage disconnect
- 6V, 7 W MR 16 halogen lamps
- UL listed for damp locations
- 120/277 VAC
- 13¾"L x 51/8"H x 3"W
- 5-year warranty
- White

Part No Description

142EE Emergecny Light, 6V, 14 W

WET LOCATION EXIT SIGN

Ideal for environments where water, oil, and corresives are present.



Features

- Magnetic switch
- LED indicator
- NEMA 4X rated
- UL listed for wet/damp locations
- 120/277 VAC
- 131/8"L x 91/16"H x 37/16"W
- 5-year warranty
- Red/White

Part No Description

∧ 146EE Exit Sign



| 33

EXIT & EMERGENCY LIGHTING

EVERGLOW® PHOTOLUMINESCENT EXIT SIGN

Made of aluminum and contains no radioactive or toxic components.

- 2 self-adhesive chevrons
- Mounting hardware included
- 14" x 8½
- Green

Part No Description

 908924GEW Photoluminescent Exit Sign



908924GEW

ALL-WEATHER EMERGENCY LIGHT

Ideal for applications with high-humidity, oily, or corrosive non-hazardous environments.

- Low-voltage disconnect
- Test button
- LED indicator
- Solid-state charger
- 120/277 VAC
- 83/8"L x 127/8"H x 6"W
- 5-year warranty
- Gray

Part No Description **148EE** Emergency Light



148EE

COMBINATION LED EXIT/LIGHTING UNITS

Economical, compact, and low profile.

- Injection-molded, flame-resistant, high-impact thermoplastic housing
- Solid-state chargers
- Universal mounting
- Pop-out chevrons
- Push-to-test switch
- Low-voltage disconnects
- LED indicators
- 120/277 VAC
- 23"L x 11"H x 2¾"W
- 5-year warranty

Part No Description

Combo Unit, Red LED, Black **▲ 136EE** Combo Unit, Red LED, White

▲LED4SPRC Combo Unit, Red LED w/ Remote Power & Ultra-Bright LED Lamps, White

▲ 138EE Combo Unit, Green LED, White



137EE



136EE

REPLACEMENT LAMPS & BATTERIES

Designed for use in exit and emergency lighting units.

Part No Description

274EE 120 VAC, 7 W Candelabra Screw (7C7) 145 VAC, 15 W Candelabra Screw (15T6) **279EE** 258EE 6V, 5.4 W Miniature Wedge (939) Battery, 6V, 4.5 A, 23/4" x 4" x 17/8" Battery, 6V,7 A, 6" x 3¾" x 2"





LIGHTING PRODUCTS & BATTERIES



HDBIN32EEN

TOOLS & TOOL STORAGE



430BKCL

CHEMICALS, LUBRICANTS, & CLEANERS



311836SCJ

ABSORBENTS & PAPER PRODUCTS



107795SPC

FACILITY MAINTENANCE



CWFSTF

BEYOND FIRE & LIFE SAFETY



888.675.0190 (Toll Free) | 208.314.7475 (Local & Intl.) | 208.672.3003 (Fax)

info@ifwsales.com | www.ifwproducts.com

SKIN CARE



WORKER SAFETY & SECURITY



159200201SQ

FIRST AID & EMERGENCY PRODUCTS



223UFAOAC

PERSONAL SAFETY PRODUCTS



950LMG

MATERIAL HANDLING



30230BLUEAM